

**To create an efficient,
reliable and clean energy future**



Sunwoda Energy Technology Co., Ltd.

Address: No.18,Tangjia South Road,FengHuang Street, Guangming New District, Guangdong, China
E-mail: info@sunwoda.com Tel: +86 755 2267 0380



Information may be modified without notice.



CONTENTS

02 - Company Profile

06 - Residential ESS

20 - Hybrid Inverter

22 - Optimized C&I Solution

42 - System

IN THE PAST 29 YEARS

we have been everywhere in your daily life

Energy storage system and solution

In 2016, the subsidiary Sunwoda Energy was founded, spanning residential, commercial, industrial, utility, network, and smart energy storage.

Electric vehicle battery

Since 2012, Sunwoda Group has focused on EV batteries.

Consumer battery

Since then, it has dominated the consumer battery market with one third of the market share.

Cellphone battery

Late 1990s, Sunwoda Group manufactured its first cellphone battery.



COMPANY PROFILE

Sunwoda Energy

As one subsidiary of Sunwoda Group (SZ300207), Sunwoda Energy Technology Co., Ltd. is a globally leading high-tech enterprise focusing on Residential, Commercial&Industrial, Utility Energy Storage Solutions, Network Energy, and Smart Energy.

With over 29 years of experience in the sustainable energy industry, we have the expertise to provide comprehensive energy solutions, including Lithium Battery Cells, Energy Storage Products, and customized Energy Investment&Operational Services.

Sunwoda Inside, Empower Our Future!



TOP 10

Top 10 global
battery companies




29 years

Focus on new energy
industry for 29 years



50000+

50000+ staff worldwide

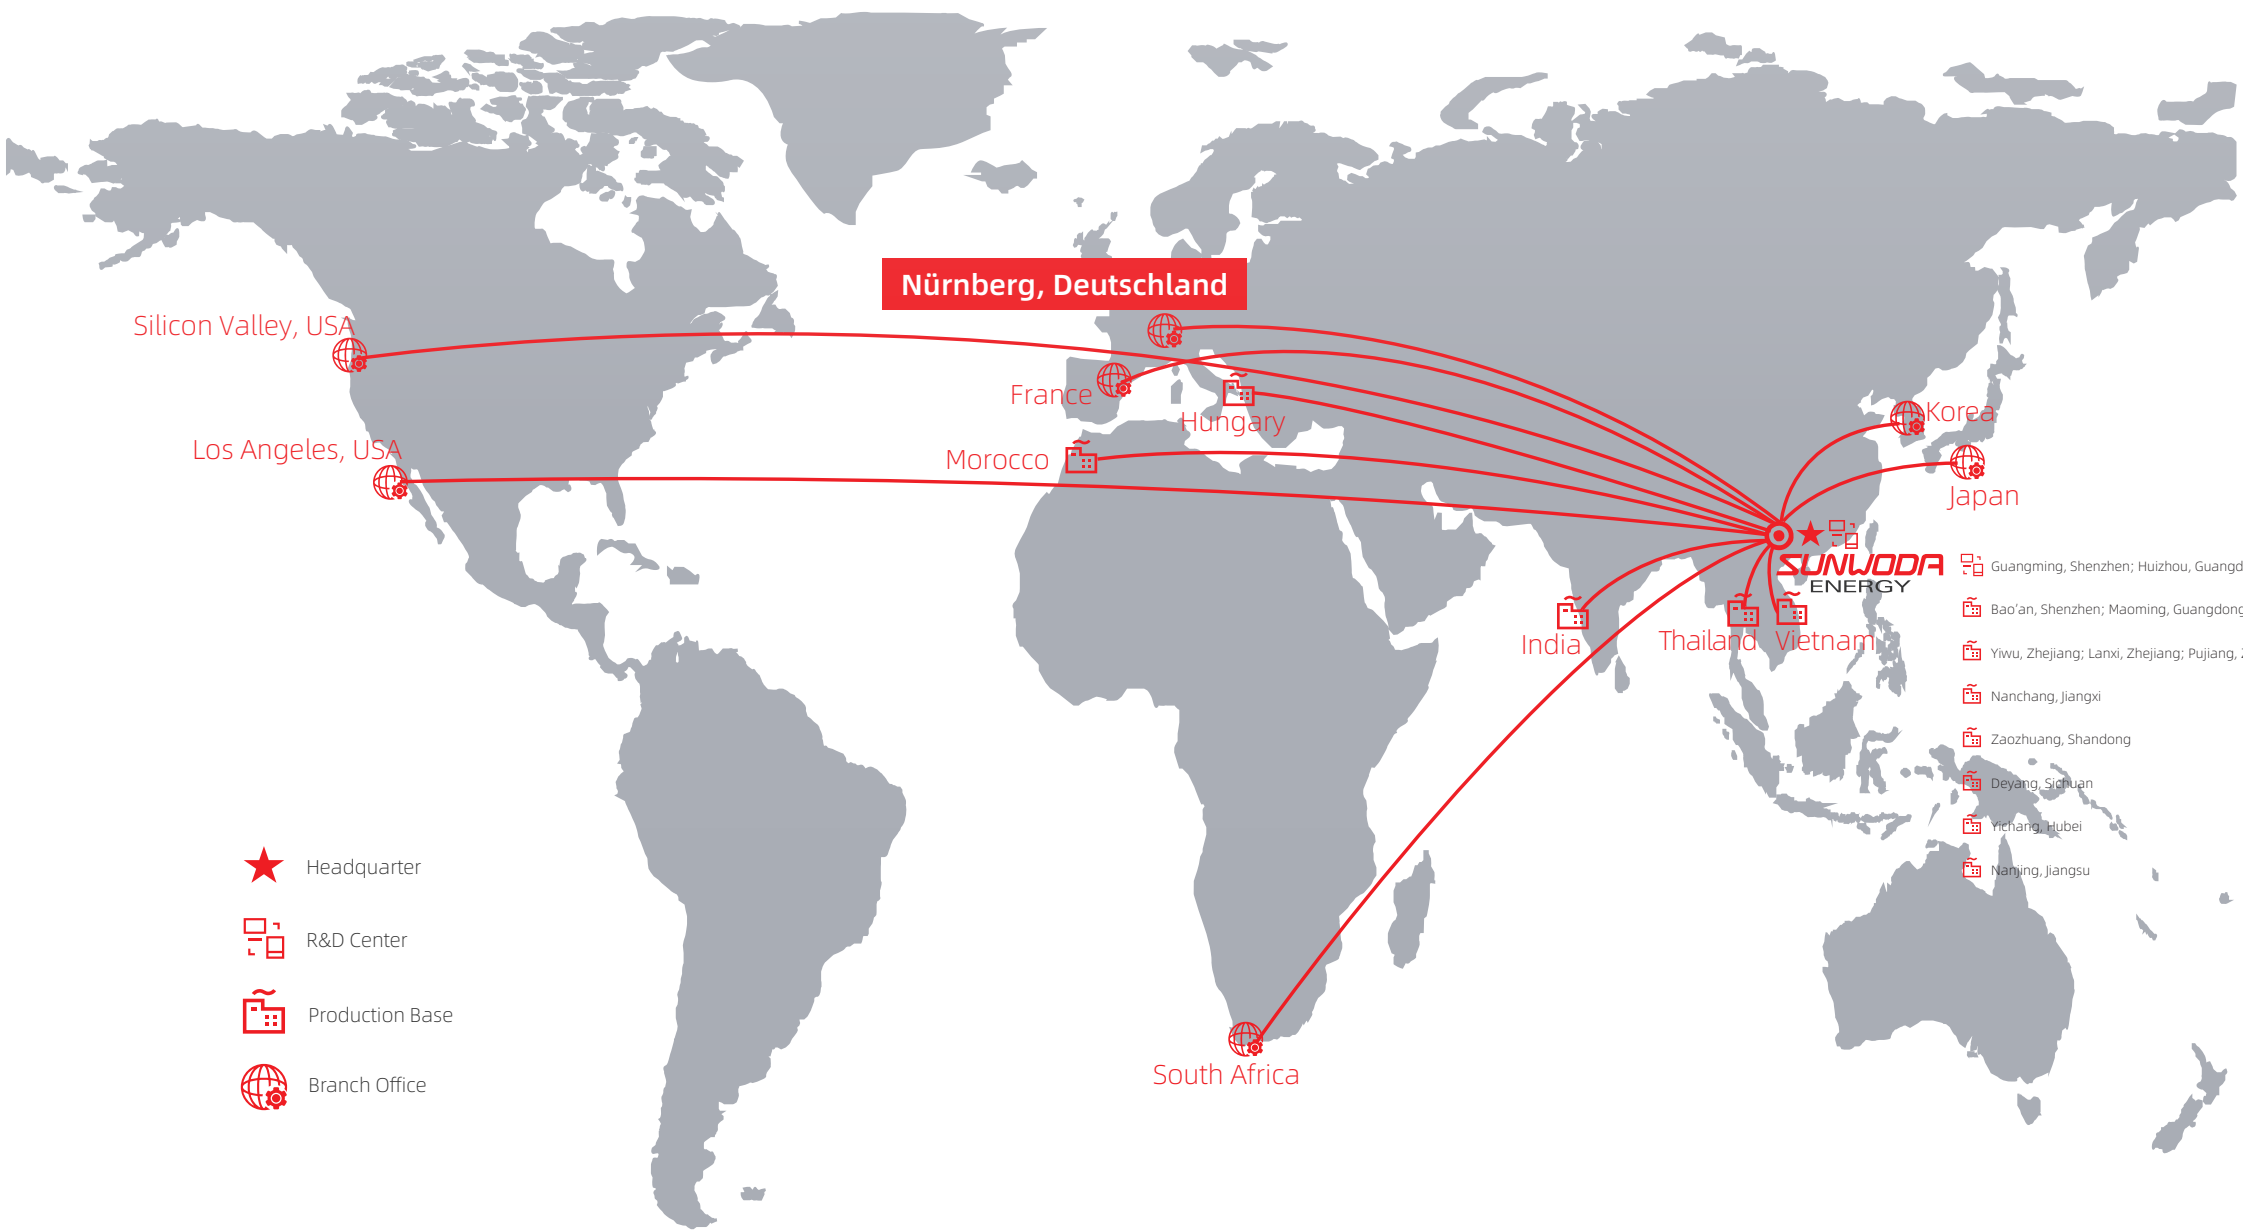


Globalization

A global presence with production plants, R&D centers, and sales divisions located across the world .

Atrix

Sunwoda Atrix series adopts a flexible modular design, which can be expanded from 5 kWh of a single module to 1.2MWh of 240 battery modules.

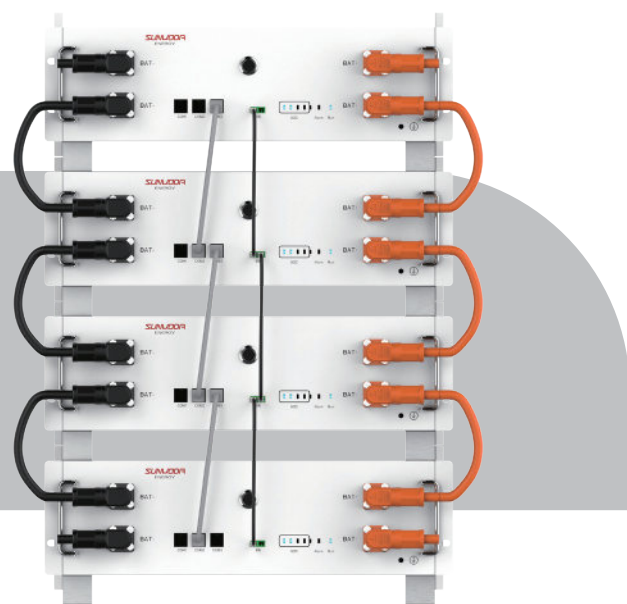

Flexible application

- Optimized for rack and build-in cabinet installation



Easy to install

- Plug and play
- Compact and Light
- 2 persons installation



Excellent performance

- 100% DOD
- Operate at -10°C without any limitation and attenuation



Battery APP (Optional)

- Real time monitoring
- Remote maintenance and upgrades (Optional)

Atrix

Model	Atrix-5	Atrix-10	Atrix-15	Atrix-20
Nominal energy	5kWh	10kWh	15kWh	20kWh
Usable energy (100% DOD) ¹	5kWh	10kWh	15kWh	20kWh
Rated voltage	51.2V	51.2V	51.2V	51.2V
Charge/discharge cut off voltage	44.8V~55.2V	44.8V~55.2V	44.8V~55.2V	44.8V~55.2V
Rated charge/discharge current ²	50A/80A	100A/160A	150A/240A	200A/320A
Max. charge/discharge current ²	100A/100A	180A/180A	240A/240A	320A/320A
Communication interface	CAN 2.0/RS485			
Scalability	Max.240 in parallel (Optional Data Box)			

Operating conditions	
Installation location	Indoor
Ambient Temperature	Discharging: -4°F to 122°F (-20°C to 50°C), Charging: 14°F to 122°F (-10°C to 50°C)
Humidity	5% to 95% (no condensation)
Dimensions (W*H*D, mm)	440*135*410/PACK
Weight	45kg/90kg/135kg/180kg
Enclosure protection rating	IP20
Altitude	<4000m
Cooling	Natural convection
Warranty	10 years ³
Certificates	IEC62619/CE/CEI 0-21/UL1973/FCC/UN38.3
1. Test conditions: 100% DOD, 0.2C charge & discharge at 25°C. 2. The current is affected by temperature and SOC. 3. For warranty instructions, please refer to the warranty terms.	



Atrix Basic

Sunwoda Atrix Basic adopts a flexible modular design, which can be expanded from 5 kWh of a single module to 1.2MWh of 240 battery modules.



*Restricted Sales Region

Atrix Basic

Model	Atrix Basic-5	Atrix Basic-10	Atrix Basic-15	Atrix Basic-20
Nominal energy	5kWh	10kWh	15kWh	20kWh
Usable energy (100% DOD) ¹	5kWh	10kWh	15kWh	20kWh
Rated voltage	51.2V	51.2V	51.2V	51.2V
Charge/discharge cut off voltage	44.8V~55.2V	44.8V~55.2V	44.8V~55.2V	44.8V~55.2V
Rated charge/discharge current ²	50A/80A	100A/160A	150A/240A	200A/320A
Max. charge/discharge current ²	100A/100A	180A/180A	240A/240A	320A/320A
Communication interface	CAN 2.0/RS485			
Scalability	Max.240 in parallel (Optional Data Box)			

Operating conditions

Installation location	Indoor
Ambient Temperature	Discharging: -4°F to 122°F (-20°C to 50°C), Charging: 32°F to 122°F (0°C to 50°C)
Humidity	5% to 95% (no condensation)
Dimensions (W*H*D, mm)	440*135*410/PACK
Weight	45kg/90kg/135kg/180kg
Enclosure protection rating	IP20
Altitude	<4000m
Cooling	Natural convection
Warranty	10 years ³
Certifications	IEC62619/CE/UN38.3

1. Test conditions: 100% DOD, 0.2C charge & discharge at 25°C.
2. The current is affected by temperature and SOC.
3. For warranty instructions, please refer to the warranty terms.



Flexible application

- Optimized for rack and build-in cabinet installation



Easy to install

- Lug connection
- Compact and light, 2 persons installation



Battery APP (Optional)

- Real time monitoring
- Remote maintenance and upgrades (optional)



Atrix Smart



Flexible application

- Modular design, easily extend capacity



Flexible installation

- Compact and light, 2 persons installation
- Wall mounted/floor installation



Excellent performance

- 100% DOD
- Operate at -10°C without any limitation and attenuation



Remote data access&control (optional)

- One data logger manage multiple devices (up to 16)
- Real-time monitoring
- Remote operation and upgrades

Atrix Smart


Model	Atrix Smart 5	Atrix Smart 10	Atrix Smart 15	Atrix Smart 20
Nominal energy	5kWh	10kWh	15kWh	20kWh
Usable energy (100% DOD) ¹	5kWh	10kWh	15kWh	20kWh
Rated voltage	51.2V	51.2V	51.2V	51.2V
Charge/discharge cut off voltage	44.8V~55.2V	44.8V~55.2V	44.8V~55.2V	44.8V~55.2V
Rated charge/discharge current ²	50A/80A	100A/160A	150A/240A	200A/320A
Max. charge/discharge current ²	100A/100A	180A/180A	240A/240A	320A/320A
Communication interface	CAN 2.0/RS485			
Scalability	Max. 16 in parallel, Max. 80 kWh			

Operating conditions	
Installation location	Indoor
Ambient Temperature	Discharging: -4°F to 122°F (-20°C to 50°C), Charging: 14°F to 122°F (-10°C to 50°C)
Humidity	5% to 95% (no condensation)
Dimensions (W*H*D, mm)	501*142*452/PACK
Weight	45kg/90kg/135kg/180kg
Enclosure protection rating	IP20
Altitude	<4000m
Cooling	Natural convection
Warranty	10 years ³
Certifications	IEC62619/CE/UN38.3
1.Test conditions: 100% DOD, 0.2C charge & discharge at 25°C. 2.The current is affected by temperature and SOC. 3.For warranty instructions, please refer to the warranty terms.	



Atrix Max+

Energy storage battery—16kWh

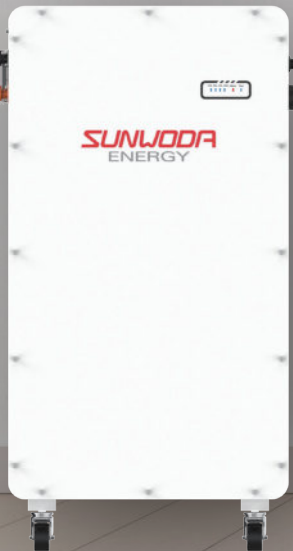

Excellent performance

- Safe LFP cell with 10000 cycles
- DC switch ensures safer installation and operation



Flexible application

- 16 kWh per battery , scalable to 512kWh with up to 32 batteries in parallel
- IP65 rated with strong environmental adaptability



Minimalist structure

- Casters for easy mobility
- Compact size and high energy density



Intelligent Management

- Real time monitoring
- Remote maintenance and upgrades

Atrix Max+

Model		Atrix Max-16L-P	
Nominal energy		16kWh	
Usable energy (100% DOD) ¹		16kWh	
Rated voltage		51.2V	
Charge/discharge cut off voltage		44.8V~57.6V	
Rated charge/discharge current ²		157A/157A	
Max. charge/discharge current ²		220A/220A	
Peak output current ²		300A@5min	
Communication interface		CAN 2.0/RS485	
Scalability		Max. 32 in parallel, Max. 512 kWh	
Casters		Integrated	
WiFi module		Integrated	
Aerosol fire extinguisher*	Unintegrated	Integrated*	
Installation location		Outdoor or indoor	
Installation		Floor-Mounted, Wall-Mounted (Optional)	
Ambient Temperature*	Discharging:-20°C to 55°C Charging:0°C to 55°C	Discharging:-20°C to 55°C Charging:-20°C to 55°C*	
Humidity		5% to 95% (no condensation)	
Dimensions		500*970*265mm (W*H*D)	
Weight		130kg	
Enclosure protection rating		IP65	
Altitude		< 4000m	
Cooling		Natural convection	
Warranty		10 years ³	
Certifications		IEC62619/CE/UN38.3	
1.Test conditions: 100% DOD, 0.2C charge & discharge at 25°C. 2.The current is affected by temperature and SOC. 3.For warranty instructions, please refer to the warranty terms. * Integrated charging -20°C to 55°Cand aerosol fire extinguishers are only available in the European market.			



MonaWall-SE5

Cleaner Power, Reliable Benefits -
Lighter Weight, Faster Installation.



Flexible application

- Optimized for wall-mounted installation



Easy to install

- Plug and play
- Compact and Light
- 2 persons installation



Excellent performance

- 100% DOD
- Operate at -10°C without any limitation and attenuation



Battery APP (optional)

- Real time monitoring
- Remote maintenance and upgrades

MonaWall-SE5

Model	MonaWall-SE5
Nominal energy	5kWh
Usable energy (100%DOD) ¹	5kWh
Rated voltage	51.2V
Charge/discharge cut off voltage	44.8V~55.2V
Rated charge/discharge current ²	50A/80A
Max. charge/discharge current ²	100A/100A
Communication interface	CAN 2.0/RS485
Scalability	Max. 16 in parallel, Max. 80 kWh

Operating conditions	
Installation location	Outdoor or indoor
Ambient Temperature	Discharging: -4°F to 122°F (-20°C to 50°C), Charging: 14°F to 122°F (-10°C to 50°C)
Humidity	5% to 95% (no condensation)
Dimensions (W*H*D, mm)	544*533*162
Weight	53kg
Enclosure protection rating	IP65
Altitude	< 4000m
Cooling	Natural convection
Warranty	10 years ³
Certifications	IEC62619/CE/CEI 0-21/UN38.3
1. Test conditions: 100% DOD, 0.2C charge & discharge at 25°C. 2. The current is affected by temperature and SOC. 3. For warranty instructions, please refer to the warranty terms.	



SunESS

Sunwoda SunESS series provide the most safety & reliable energy storage solutions to customer worldwide.



Flexible capacity options

- Stackable module design, easily extend
- 5kWh per module, scalable from 5 to 60kWh



Easy to install

- Without wire connection
- Compact and Light, 2 persons installation



Excellent performance

- 100% DOD
- Operate at -10°C without any limitation and attenuation



Remote Data Access&Control

- Real time monitoring
- Remote maintenance and upgrades

SunESS

Model	SunESS-5	SunESS-10	SunESS-15	SunESS-20
Nominal energy	5kWh	10kWh	15kWh	20kWh
Usable energy (100% DOD) ¹	5kWh	10kWh	15kWh	20kWh
Rated voltage	51.2V	51.2V	51.2V	51.2V
Charge/discharge cut off voltage	44.8V~55.2V	44.8V~55.2V	44.8V~55.2V	44.8V~55.2V
Rated charge/discharge current ²	50A/80A	100A/160A	150A/200A	200A/200A
Max. charge/discharge current ²	100A/100A	180A/180A	200A/200A	200A/200A
Communication interface	CAN 2.0/RS485			
DC disconnect	Circuit breaker, 250A, 80V rating			
Scalability	Max. 3 in parallel, Max. 60kWh			

Operating conditions	
Installation location	Outdoor or indoor
Ambient Temperature	Discharging: -4°F to 122°F (-20°C to 50°C), Charging: 14°F to 122°F (-10°C to 50°C)
Humidity	5% to 95% (no condensation)
Dimensions (W*H*D, mm)	573*(597/912/1227/1542)*189
Weight	65kg/115kg/165kg/215kg
Enclosure protection rating	IP65
Altitude	< 4000m
Cooling	Natural convection
Warranty	10 years ³
Certifications	IEC62619/CE/CEI 0-21/UL1973/FCC/UL9540/UL9540A/UN38.3
1.Test conditions: 100% DOD, 0.2C charge & discharge at 25°C. 2.The current is affected by temperature and SOC. 3.For warranty instructions, please refer to the warranty terms.	





SunESS H

Smart Stacked Energy Storage System

Sunwoda SunESS H series provide the most safety & reliable energy storage solutions to customer worldwide.

-  High voltage (~400V) enabled by built-in DC-DC
-  Flexible capacity configuration (5-60kWh)
-  Module level energy optimization, mixed use of old and new
-  Compatible with market-leading hybrid inverter(> 10 brands)
-  Safe and long-life LiFePO4 (LFP) technology, with 6000 cycles

SunESS - H

Model	SunESS-5H	SunESS-10H	SunESS-15H	SunESS-20H
Nominal energy	5kWh	10kWh	15kWh	20kWh
Usable energy (90% DOD) ¹	4.5kWh	9kWh	13.5kWh	18kWh
Rated voltage	400V	400V	400V	400V
Operating voltage range	350V~450V	350V~450V	350V~450V	350V~450V
Rated charge/discharge power ²	2.5kW	5kW	7.5kW	10kW
Peak output power	4.2kW/20s	8.4kW/20s	12.6kW/20s	16.8kW/20s
Communication interface	CAN 2.0/RS485			
DC disconnect	Circuit breaker, 50A, 1000V rating			
Scalability ³	Max. 3 in parallel, Max. 60 kWh			

Operating conditions	
Installation location	Outdoor or indoor
Ambient Temperature	-4°F to 122°F (-20°C to 50°C)
Humidity	5% to 95% (no condensation)
Dimensions (W*H*D, mm)	653*(553/868/1183/1498)*189
Weight	65kg/117kg/169kg/221kg
Enclosure protection rating	IP65
Altitude	< 4000m
Cooling	Natural convection
Noise emission	< 29dB
Warranty	10 year ⁴
Certifications	IEC62619/CE/UN38.3/VDE 2510-50/CEI 0-21/FCC/UL1973
1.Test conditions: 90% DOD, 0.2C charge & discharge at 25°C. 2.The power is affected by temperature and SOC. 3.Optional Data box supports three-cluster parallel operation,refer to the user manual for details. 4.For warranty instructions, please refer to the warranty terms.	





SunESS Power

All-in-One



All-in-One

- Modular, Compact and Simple
- Easy Installation(30 Minutes Max)
- Flexible Battery Expansion (5kWh-40kWh)



Safe and reliable

- Short circuit protection
- Optional Arc-fault prevention (AFCI)
- Optional rapid shut-down (RSD)



Withstand 150% inrush current over 10 seconds



Support 150% oversized PV power



Support 100% 3 phase Unbalanced load



Ultra-fast switching (10ms) from On-grid to Off-grid state



Max. 12 years' warranty



Support heat pump integration

System Parameters								
Norminal Output Power	5~15kW							
Number of battery module	1	2	3	4	5	6	7	8
Battery nominal energy	5kWh	10kWh	15kWh	20kWh	25kWh	30kWh	35kWh	40kWh
Dimensions (W/H/D) mm	650/833/250	650/1148/250	650/1463/250	650/1778/250	650/1463/250 653/868/189	650/1463/250 653/1183/189	650/1778/250 653/1183/189	650/1778/250 653/1498/189
Total weight	96kg	148kg	200kg	252kg	200kg+117kg	200kg+169kg	252kg+169kg	252kg+221kg
Ambient Temperature	-4°F to 122°F(-20°C to 50°C)							
Relative humidity	5% to 95% (no condensation)							
Altitude	<4000m(>3000m derating)							
Cooling method	Air cooling							
Noise emission	<47dB							
Ingress protection	IP65							
Installation method	Stacked/Leaning against the wall							
Safety standards	EN 62109-1/EN 62109-2/EN 62477-1/EN 61000-6-1/EN61000-6-3							
Grid standards	EN 50549-1/VDE4105/VDE 0124//NC-RfG:2016/EIF5:2018/Tor Type A/ NA/EEA-NE7-CH2020							
Battery standards	IEC62619/CE/UN38.3/VDE 2510-50/FCC/UL1973							

SunESS Power All-in-One

Battery Module						
Battery Type	LiFePO4					
Nominal energy	5kWh					
Usable energy	4.5kWh					
Rated voltage	400V					
Voltage range	350~450V					
Rated charge/discharge power	2.5kW					
Peak output power	4.2kW/20s					
Weight	52kg					
Dimensions (W/H/D)	653/315/189mm					
Inverter Module	SW5KH3UT	SW6KH3UT	SW8KH3UT	SW10KH3UT	SW12KH3UT	SW15KH3UT
PV Input Parameters						
Max. input power	8000W	9000W	12000W	15000W	22500W	22500W
Max. input voltage	1000V					
MPPT voltage range	180~850V					
Start-up voltage	180V					
Max. input current per MPPT*	A: 15A	A: 15A	A: 15A / B: 30A	A: 15A / B: 30A	A: 15A / B: 30A	A: 15A / B: 30A
Max. short-circuit current per MPPT*	A: 19A	A: 19A	A: 19A / B: 38A	A: 19A / B: 38A	A: 19A / B: 38A	A: 19A / B: 38A
Number of MPPTs	1	1	2	2	2	2
Number of input strings per MPPT*	A: 1	A: 1	A: 1 / B: 2	A: 1 / B: 2	A: 1 / B: 2	A: 1 / B: 2
Battery Input Parameters						
Support battery capacity	5~40kWh					
Rated battery voltage	400V					
Battery voltage range	350~450V					
Max. continuous charging current	23A			46A		
Max. continuous discharge current	23A			46A		
Max. discharge power	5000W	6000W	8000W	10000W	12000W	15000W
Max. charging power	5000W	6000W	8000W	10000W	12000W	15000W
Output parameters(On-grid)						
Rated output power	5000W	6000W	8000W	10000W	12000W	15000W
Max. output apparent power	5000VA	6000VA	8000VA	10000VA	12000VA	15000VA
Max. input apparent power	8000VA	9000VA	12000VA	15000VA	18000VA	22500VA
Rated output voltage	220/380V 230/400V 3W/N/PE					
Rated output frequency	50Hz					
Max. output current	8.4A	10A	13.4A	16.7A	20A	25A
Max. input current	12.2A	13.7A	18.2A	22.8A	27.4A	34.2A
Power factor	0.8 leading to 0.8 lagging					
THDi	<3%					
Output parameters(Off-grid)						
Off-grid rated apparent power	5000VA	6000VA	8000VA	10000VA	12000VA	15000VA
Max. output apparent power	5500VA	6600VA	8800VA	11000VA	13200VA	16500VA
Max. output current	7.6A	10A	13.4A	16.7A	20A	25A
Rated output voltage	220/380V 230/400V 3W/N/PE					
Rated output frequency	50Hz					
THDv (@Linear Load)	<3%					
Efficiency						
Max. efficiency	97.4%	97.4%	97.8%	97.8%	97.8%	97.8%
Euro. Efficiency	96.5%	96.5%	96.8%	96.8%	97%	97%
Protection						
Input DC switch	Integrated					
Insulation Resistance Detection	Integrated					
Residual current monitoring	Integrated					
Input reverse polarity protection	Yes					
Anti-Islanding Protection	Yes					
Over current protection	Yes					
AC short circuit protection	Yes					
AC Over voltage protection	Yes					
AFCI(Arc Fault Circuit Interrupter) Protection	Optional					
Dry contact remote scheduling	Yes					
DC Surge Protection	Integrated					
AC surge protection	Integrated					
Basic parameters						
Display	LED&APP					
BMS communication method	CAN					
Meter communication method	RS485					
Monitoring method	WiFi/bluetooth					
Topology	Transformerless					
Operating temperature range	- 30~60 °C (> 45°Cderating)					
Weight	41kg					
Dimensions (W/H/D)	650/480/250mm					

* "A" corresponds to the silkscreen marking "PV2" on the inverter . "B" corresponds to the silkscreen marking "PV1" on the inverter.

OASIS Flex



Easy to install and deploy with large space utilization



Unique modular design & flexible function configuration



Real time monitoring , remote maintenance and upgrades



Strong scalability, simple & convenient expansion on DC sides

OASIS Flex

System Model	CIESS25-R-S	CIESS30-R-S	CIESS35-R-S	CIESS40-R-S	CIESS45-R-S	CIESS50-R-S	CIESS55-R-S	CIESS60-R-S	CIESS65-R-S	CIESS70-R-S	CIESS75-R-S	CIESS80-R-S
Number of battery packs	5	6	7	8	9	10	11	12	13	14	15	16
Rated voltage	256V	307.2V	358.4V	409.6V	460.8V	512V	563.2V	614.4V	665.6V	716.8V	768V	819.2V
Voltage range	224~288V	268.8~345.6V	313.6~403.2V	358.4~460.8V	403.2~518.4V	448~576V	492.8~633.6V	537.6~691.2V	582.4~748.8V	627.2~806.4V	672~864V	716.8~921.6V
Rated energy	25kWh	30kWh	35kWh	40kWh	45kWh	50kWh	55kWh	60kWh	65kWh	70kWh	75kWh	80kWh
Max. C-rate	1C	1C	1C	1C	1C	1C	1C	1C	1C	1C	1C	1C
Weight	248kg	294kg	340kg	386kg	432kg	478kg	524kg	570kg	616kg	662kg	708kg	754kg
Dimension (W*D*H, mm)	480*410*1040	480*410*1210	1180*410*700	1180*410*870	1180*410*870	1180*410*1040	1180*410*1040	1180*410*1210	1880*410*870	1880*410*870	1880*410*1040	1880*410*1040
Cycle life	6000 times (25°C, 0.5C/0.5C, 90%DOD, EOL60%)*											
Communication	CAN/RS485/WiFi/ETH											
Expansion	Support in parallel up to 6 clusters											
Enclosure protection rating	IP20											
Cooling	Natural cooling											
Ambient temperature	Charge: 0°C~50°C											
	Discharge: -20°C~55°C											
Ambient humidity	10%~95%RH											
Altitude	2000m											
Short circuit protection	Yes											
Over current protection	Yes											
Over charge protection	Yes											
Over discharge protection	Yes											
Over voltage protection	Yes											
Under voltage protection	Yes											
Over temperature protection	Yes											
Certifications	UN38.3/CE/IEC62619/IEC62477											
Module Parameter												
Module Model	B051100S02											
Module Rated voltage	51.2V											
Module Energy	5kWh											
Dimensions	443*135*410mm (W*H*D)											
Module Weight	43.3kg											
Warranty	5 years*											
* For warranty instructions, please refer to the warranty terms.												

OASIS 60



Plug-and-Play Installation (Pre-Wired), Convenient Expansion from 60kWh to 360kWh; IP55 Rated.



An Outdoor Battery with Air Cooling for Ultimate Convenience.



Equipped with Fire Suppression System, Smoke Sensors, and Emergency Button for Enhanced Safety and Protection.



Compatibility with Solis, Deye, and Solinteg inverters offers unparalleled flexibility, empowering you to tailor your energy solution.

OASIS 60

Model Type	CIESS 60
System Parameters	
Battery number	12pcs
Rated voltage	614.4V
Voltage range	537.6~691.2V
Max. C-rate	1C
Rated energy	60kWh
Weight	807kg
Dimensions	890*2140*715mm (W*H*D)
Expansion	Supports up to 6 battery cabinets in parallel
Protection level	IP55
Temperature control method	Air-conditioning
Ambient temperature	-20°C~55°C
Recommended storage temperature	20°C~30°C
Ambient humidity	10%~95% (no condensation)
Communication	CAN/RS485/Wifi
Warranty	5 years*
Altitude	2000m
Cycle life	6000 times (25°C, 0.5C/0.5C, 90%DOD, EOL60%)*
Basic protection functions	Charge overvoltage, discharge under voltage, overcurrent, over temperature, short circuit protection, etc.
Accreditation	IEC62619/CE/UN38.3/IEC62477
* For warranty instructions, please refer to the warranty terms.	



OASIS Rack Pro +



Easy to install and deploy with large space utilization



Unique modular design & flexible function configuration



Real time monitoring , remote maintenance and upgrades



Strong scalability, simple & convenient expansion on DC sides

OASIS Rack Pro +

Product Model	CIESS-100-RP	CIESS-120-RP	CIESS-160-RP	CIESS-200-RP
DC side parameter				
Cell specification	3.2V 314Ah			
Cell type	LFP			
PACK specification	1P20S, 64V, 20kwh			
PACK quantity	5	6	8	10
Rated capacity	100kWh	120kWh	160kWh	200kWh
Rated voltage	320V	384V	512V	640V
Voltage Range	290~360V	348~432V	464~576V	580~720V
Max. Charge and Discharge Ratio	0.7C	0.7C	0.7C	0.7C
System parameter				
Communication mode	CAN, RS485, Ethernet			
Cooling method	Intelligent air cooling			
Installation method	Indoor			
Protection degree	IP20			
Ambient temperature	0°C~+55°C (> 45°C derating)			
Ambient humidity	0~95% (no condensation)			
Altitude	3000m			
Cell Cycle Life	9000 times (25°C, 0.5C/0.5C, 90%DOD, EOL70%)*			
Dimensions	1160*2060*976mm(W*H*D)			
Weight	< 2100kg			
Certification	UN38.3/IEC 62619/IEC 61000/IEC 62477			
* For warranty instructions, please refer to the warranty terms.				



OASIS A200



PV and Storage Integration



Peak shaving and valley filling



Emergency Backup



Micro-grid



Cloud Platform Scheduling



Frequency and Peak Modulation

OASIS A200

Product Model	CIESS-120	CIESS-160	CIESS-200
DC Side			
Cell Type	LFP		
Cell Specification	3.2V 314Ah		
PACK Capacity	20kWh		
PACK quantity	6	8	10
Rated Capacity	120kWh	160kWh	200kWh
Rated Voltage	384V	512V	640V
Voltage range	348~432V	464~576V	580~720V
Max. Charge and Discharge Ratio	0.7C	0.7C	0.7C
System Parameter			
Communication Interface	CAN, RS485, Ethernet		
Cooling Mode	Industrial Air-conditioning		
Display	Touch Screen, Cloud Platform		
Installation Mode	Outdoor		
Protection Grade	IP55		
Ambient Temperature	-30℃~+55℃ (> 45℃ derating)		
Ambient Humidity	0~95% (no condensation)		
Altitude	3000m		
Cell Cycle Life	9000 times (25℃, 0.5C/0.5C, 90%DOD, EOL70%)*		
Dimensions	1150*2200*1375mm (W*H*D)		
Weight	< 2300kg		
Certification	UN38.3/IEC 62619/IEC 61000/IEC 62477		
* For warranty instructions, please refer to the warranty terms.			



Storage Integration,Multi-protection Design



Peak shaving and valley filling



Flexible installation, Easy to expand, Plug and Play

OASIS A200 All-in-One

Product Model	CIESS-A-200
DC Side	
Cell Type	LFP
Cell Specification	3.2V 314Ah
PACK Capacity	20kWh
Rated Capacity	200kWh
Rated Voltage	640V
AC Side	
Rated Output Power	125kW
THDi	< 3% (Rated Power)
Rated Voltage	400V (300~440)
Rated Frequency	50/60Hz (±5Hz)
Power Factor	-1 (Leading) ~ 1 (Lagging)
System Parameter	
Communication Interface	CAN, RS485, Ethernet
Cooling Mode	Industrial Air-conditioning
Display	Touch Screen, Cloud Platform
Installation Mode	Outdoor
Protection Grade	IP55
Ambient Temperature	-30°C~+55°C (> 45°C derating)
Ambient Humidity	0~95% (no condensation)
Altitude	3000m
Cell Cycle Life	9000 times (25°C, 0.5C/0.5C, 90%DOD, EOL70%)*
Dimensions	1150*2200*1375mm (W*H*D)
Weight	< 2400kg
Certification	UN38.3/IEC 62619/IEC 61000/IEC 62477/VDE4105/4110/G99/EN50549/NTS 631
* For warranty instructions, please refer to the warranty terms.	

OASIS L215



-  Support maximum continuous 1 C charge / discharge rate.
-  Ultimate safety, Multi-protection design, with combustible gas venting and explosion relief design.
-  Innovative liquid cooling technology, extending battery lifespan by over 20%.
-  Modular design, support capacity expansion, flexible installation.

OASIS L215

Single Cluster Solution	
Model Type	OASIS L215
Rated energy	215kWh
Cell Specification	3.2V 280Ah
PACK Capacity	43.008kWh
No.of modules	5
Rated voltage	768V
Voltage range	624~876V
Max. C-rate	1C
Ambient temperature	-30°C~55°C
Working relative humidity	0~95% (no condensation)
Altitude	2000m
Cooling method	Liquid cooling
Fire suppression system	Cluster level aerosol agent fire suppression+combustible gas detection and ventilation linkage+deflagration relief panel
Auxiliary power supply	220VAC/50Hz
Communication interface	CAN/RS485/Ethernet
Enclosure protection rating	IP55
Dimensions(W*D*H)	1570mm*1350mm*2380mm
Weight	2520kg
Accreditation	CE/IEC62619/UL1973/UN38.3/IEC62477



OASIS L241



-  Ultimate safety, Multi-protection design, with combustible gas venting and explosion relief design
-  Innovative liquid cooling technology, extending battery lifespan by over 20%.
-  Modular design, support capacity expansion, flexible installation

OASIS L241

Single Cluster Solution	
Model Type	OASIS L241
Rated energy	241kWh
Cell Specification	3.2V 314Ah
PACK Capacity	48.2kWh
No.of modules	5
Rated voltage	768V
Voltage range	624~876V
Max. C-rate	0.7C
Ambient temperature	-30°C~55°C
Ambient Humidity	0~95% (no condensation)
Altitude	2000m
Cooling method	Liquid cooling
Fire suppression system	Cluster level aerosol agent fire suppression+combustible gas detection and ventilation linkage+deflagration relief panel
Auxiliary power supply	220VAC/50Hz
Communication interface	CAN/RS485/Ethernet
Enclosure protection rating	IP55
Cell Cycle Life	9000 times (25°C, 0.5C/0.5C, 90%DOD, EOL70%)*
Dimensions	1570*2380*1350mm (W*H*D)
Weight	2520kg
Accreditation	CE/IEC62619/UL1973/UN38.3/IEC62477
* For warranty instructions, please refer to the warranty terms.	



OASIS L261



Storage Integration,Multi-protection Design



Peaking and Shaving



Emergency Backup



Micro-grid

OASIS L261

Product Model	CISS-261
DC Side	
Cell Type	LFP
Cell Specification	3.2V 314Ah
PACK Capacity	52.2kWh
No. of Packs	5
Rated Capacity	261kWh
Rated Voltage	832V
Voltage Range	702~936V
System Parameter	
Communication Interface	CAN/RS485/Ethernet
Cooling Mode	Liquid cooling
Installation Mode	Outdoor
Protection Grade	IP55
Ambient Temperature	-30°C~+55°C (> 45°C derating)
Ambient Humidity	5%~95% (no condensation)
Altitude	2000m
Cell Cycle Life	9000 times (25°C, 0.5C/0.5C, 90%DOD, EOL70%)*
Dimensions	980*2350*1390mm (W*H*D)
Weight	< 2300kg
Certification	UN38.3/CE/IEC
* For warranty instructions, please refer to the warranty terms.	



OASIS L261 All-in-One



Storage Integration,Multi-protection Design



Peak shaving and valley filling



Flexible installation, Easy to expand, Plug and Play




Support ms-level and seamless on-off grid switching

OASIS L261 All-in-One

Product Model	CIESS-L-261
DC Side	
Cell Type	LFP
Cell Specification	3.2V 314Ah
PACK Capacity	52.2kWh
Rated Capacity	261kWh
Rated Voltage	832V
AC side (On-grid)	
Rated Output Power	125kW
THDi	< 3% (Rated Power)
Rated Voltage	400V (300~440V)
Rated Frequency	50/60Hz (±2.5Hz)
Power Factor	-1 (Leading) ~ 1 (Lagging)
AC Side (off-grid, Optional STS Module)	
Rated Output Power	125kW
Wiring Method	3L+N
Rated Output Voltage	400V
Rated Output Frequency	50/60Hz
THDu	<3% (Linear load)
System Parameter	
Communication Interface	CAN/RS485/Ethernet
Cooling Mode	Liquid cooling
Installation Mode	Outdoor
Protection Grade	IP55
Ambient Temperature	-30°C~+55°C (> 45°C derating)
Ambient Humidity	5%~95% (no condensation)
Altitude	2000m
Cell Cycle Life	9000 times (25°C, 0.5C/0.5C, 90%DOD, EOL70%)*
Dimensions	980*2350*1390mm (W*H*D)
Weight	< 2400kg
* For warranty instructions, please refer to the warranty terms.	

OASIS L385

Liquid Cooling Solution
Outdoor Liquid Cooling Cabinet

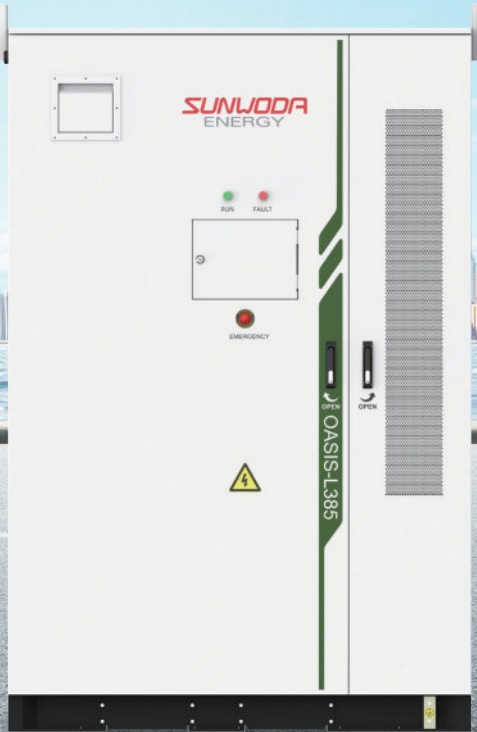

Easily configurable and scalable



Less LCOS within life span



Long service life



Smart management



High system safety



Shorter deployment time



High energy density

OASIS L385

Single Cluster Solution	
Model Type	OASIS L385
Rated energy	385kWh
Cell Specification	3.2V 314Ah
PACK Capacity	48.2kWh
No.of modules	8
Rated voltage	1228.8V
Voltage range	998.4~1401.6V
Max. C-rate	0.7C
Ambient temperature	-30°C~55°C
Ambient Humidity	0~95% (no condensation)
Altitude	2000m
Cooling method	Liquid cooling
Fire suppression system	Cluster level aerosol agent fire suppression+combustible gas detection and ventilation linkage+deflagration relief panel
Auxiliary power supply	220VAC/50Hz
Communication interface	CAN/RS485/Ethernet
Enclosure protection rating	IP55
Cell Cycle Life	9000 times (25°C, 0.5C/0.5C, 90%DOD, EOL70%)*
Dimensions	1570mm*2380*1350mm (W*H*D)
Weight	3480kg
Accreditation	CE/IEC62619/UL1973/UN38.3/IEC62477
* For warranty instructions, please refer to the warranty terms.	



OASIS Power



Modularized design, support optional STS module; flexible capacity expansion, convenient operation and maintenance.



Adjustable output power, charge and discharge power can be set, strong grid adaptability.



Smooth switching between off-grid and on-grid, uninterrupted power supply to the load.



Integrate LCU functions, support external EMS energy management strategies, can participate in the power market auxiliary services.

OASIS Power

Product Model	OSP-200K	OSP-400K
Battery Side Parameter		
Operating Voltage Range	650~950V	
Full Power Voltage Range	715~950V	
Max. Input Current	342A/171A*2	342A*2/171A*4
Connected Number of Battery Cluster Branches	1/2	2/4
Grid Side Parameter (On Grid)		
Max.Output Power	220kVA	440kVA
Nominal Output Power	200kW	400kW
Nominal Output Voltage	230/400V	
Nominal Output Current	288A/144A*2	288A*2/144A*4
Max. Output Current	318A/159A*2	318A*2/159A*4
Nominal frequency	50/60(±5Hz)	
THDi	≤3%	
Power Factor	-1(Leading)~1(Laging)	
Wiring Method	3W+N+PE	
Grid Side Parameter (Off Grid)		
Nominal Power	180kW	/
Nominal Output Voltage	230V/400V	/
Nominal Output Current	260A/130A*2	/
Nominal Frequency	50/60Hz	/
THDu	< 3% (Linear load)	/
System Parameter		
Temperature	-20℃~~55℃ (> 45℃ derating)	
Humidity	5~95%RH (no condensation)	
Altitude	2000m	
Cooling Mode	Intelligent Air-Cooling	
Protection Grade	IP54	
Dimensions	750*2060*1200mm/1200*2380*1200mm (W*H*D)	1200*2380*1200mm(W*H*D)
Weight	< 1000kg	
Accreditation	IEC 61000; IEC 62477; EN 50549-1,EN 50549-10,EN 50438,C10/C11	
* The functional configurations of the above products can be selected according to different needs.		

Approved Compatibility List of Inverter Brands

LV Residential Energy Storage Solution

Inverter brand	Inverter model	SUNWODA ENERGY BATTERY SERIES					
		SunESS Series	Atrix Series				
		SunESS	Atrix	MonaWall-SE5	Atrix Basic	Atrix Smart	Atrix Max+
SMA	SI 4.4-M SI 6.0-H SI 8.0-H	✓	✓	✓	✓	✓	✓
Victron	MultiPlus-II 48 Series Quattro 48 Series	✓	✓	✓	✓	✓	✓
Solis	RHI-(3-6)K-48ES-5G RHI-(3-5)K-48ES S6-EH1P(3-6)K-L	✓	✓	✓	✓	✓	✓
	S5-EH1P(3-6)K-L	✓ (CEI 0-21 listing)	✓ (CEI 0-21 listing)	✓	✓	✓	✓
Deye	SUN-3/3.6/5/6K-SG03LP1-EU SUN-5/6/8/10/12K-SG04LP3-EU	✓ (CEI 0-21 listing)	✓	✓	✓	✓	✓
	SUN-3.6/5/6/7.6/8K-SG01LP1-EU SUN-12/14/16K-SG01LP1-EU	✓	✓	✓	✓	✓	✓
	GW3648D/5048D-ES EM:GW3048/5048-EM LV S-BP:GW3600S/5000S-BP GW(5-20)K-ET-L-G10	✓	✓	✓	✓	✓	✓
Solplanet	ASW3000/3680/4000/5000/6000H-S2	✓	✓	✓	✓	✓	✓
Afore	AF1/1.5/2.5/3/3.6K-SL-1 AF3/3.6/4.4/6/5/5.5/6K-SL	✓	✓	✓	✓	✓	✓
invtr	XD3K6/4K/4K6/5K/6KTL	✓	✓	✓	✓	✓	✓
LuxpowerLU	LXP-LB-US 12K	✓ (UL9540 listing)	✓	✓	✓	✓	✓
	LXP3/3.6/4.6/6K, 1phase SNA3000/4000/5000/6000	✓ (CEI 0-21 listing) ✓	✓ (CEI 0-21 listing) ✓	✓ (CEI 0-21 listing) ✓	✓ ✓	✓ ✓	✓ ✓
Megarevo	R3K/3K6/4K/4K6/5K/6KL1	✓	✓	✓	✓	✓	✓
	R5K/6K/7K6/8K/10KLNA	✓ (UL9540 listing)	✓	✓	✓	✓	✓
Sacolar	M5000H-48BP,MHP series MHP 3000 series MLP series,SP series	✓	✓	✓	✓	✓	✓
Solark	Sol-Ark-5k-P/Sol-Ark-8k-P/Sol-Ark-12k-P	✓ (UL9540 listing)	✓	✓	✓	✓	✓
Senergy	SE 3K6HB-60 SE 4K6/5K/6KHB-120 SE 8/10KHB-T/EU SE 5K/6K/8K/10KHB-UL	✓	✓	✓	✓	✓	✓
Hoymiles	HYS-LV Series HAS-LV Series	✓	✓	✓	✓	✓	✓
Voltronic Power	Axpert VM III/ 4 Series Axpert MKS III/4 Series Axpert MAX/ II Series InfinitiSolar VIII/4 Series	✓	✓	✓	✓	✓	✓
GREENHEISS	GH-IH 3/4/5/6 2M STYLE GH-IH 3/4/5/6 2M-15 STYLE	✓	✓	✓	✓	✓	✓
SAJ	H1-(3-6)K-S2 H1-(3-6)K-S2-15 H2-(5-10)K-LS2	✓	✓	✓	✓	✓	✓
TBB	RiiO Sun II Series Tyrann/Kinergier pro II Series Matrix II series	✓	✓	✓	✓	✓	✓
Sinexcel	Isuna 3000S-6000S Isuna 3000SO-12000SO	✓	✓	✓	✓	✓	✓
SRNE	HFP4850S80-H/ASP48100S200-H HESP4860S100-H HESP48100S200-H HESP48120S200-H	✓	✓	✓	✓	✓	✓
OPTI	SP6000 ~ 11000 Handy Ultra SP4000 ~ 6000 Handy Plus	✓	✓	✓	✓	✓	✓
Turbo Energy	Hybrid Series 48V 5.0/6.0 Three phase Hybrid Series 48V 5.0/10.0	✓	✓	✓	✓	✓	✓
hypontech	HES-3000/3680/4000/5000/6000	✓	✓	✓	✓	✓	✓
Sofar	HYD 3-6K-EP	✓	✓	✓	✓	✓	✓
SolaX	X1-HYB-LV/X1-Lite-LV	✓	✓	✓	✓	✓	✓
GROWATT	SPH 3000-6000TL	✓	✓	✓	✓	✓	✓
Ingeteam	INGECON SUN STORAGE 1Play TL M 3-6kW	✓	✓	✓	✓	✓	✓
Sungrow	MG5RL/MG6RL	✓	✓	✓	✓	✓	✓

*The communication protocols of SunESS Series /Atrix Series/MonaWall SE5 Series/Atrix basic Series are the same.

HV Residential Energy Storage Solution

Inverter brand	Inverter model	SUNWODA ENERGY BATTERY SERIES
		SunESS-H
Solis	S6-EH3P(5-10)K-H-EU	✓ (CEI 0-21 listing)
	S6-EH3P(12-20)K-H	✓
Deye	SUN-5/6/8/10/12/15/20K/25K-SG01HP3-EU-AM2 SUN-30K-SG01HP3-US-BM SUN-29.9/30/35/40/50K-SG01HP3-EU-BM SUN-60K-SG01HP3-US-BM	✓
	MHS-3~8K-30 MHT-4~12K-25 MHT-10~20K-40	✓
SOLINTEG	HI-3P(5-12)K-H	✓
YINERGY	HYT-(5.0-12.0)HV-EUG1 HYT-(5.0-12.0)HV-AUG1 HAT-(5.0-10.0)HV-EUG1	✓
Hoymiles	Isuna 5000-20000T Isuna D5000-12K-SH Isuna D5000-12K-TH	✓
Sinexcel	AF(3K-30K)TH	✓
Afore	TriP 6-20K	✓
LuxpowerLU	HHT-5000/6000/8000/10000/12000/15000	✓
hypontech		✓

* The communication protocols of SunESS-H Series /SunESS-H2 Series are the same.

C&I Energy Storage Solution

Inverter brand	Inverter model	SUNWODA ENERGY BATTERY SERIES	
		CIESS Series 	CIESS-R-S Series 
SMA	Sunny Island X 30/50	✓	✓
Solis	S6-EH3P(29.9-50)K-H	✓ (CEI 0-21/0-16 listing)	✓ (CEI 0-21/0-16 listing)
	S6-EH3P(75-80)K10-NV-YD-H	/	✓
Deye	SUN-5/6/8/10/12/15/20K/25K-SG01HP3-EU-AM2	✓	✓
	SUN-29.9/30/35/40/50K-SG01HP3-EU-BM	✓ (CEI 0-21 listing)	✓ (CEI 0-21 listing)
	SUN-60/70/75/80K-SG02HP3-EU-EM6	✓	✓
SOLINTEG	MHT-10K/12K/15K/20K-40	✓	✓
	MHT-25K/30K/36K/40K/50K-100	✓ (CEI 0-21/0-16 listing)	✓ (CEI 0-21/0-16 listing)
Afore	AF(3K-30K)TH	✓	✓
Sofar	HYD-20KTL-3PH	✓	✓
Sinexcel	Isuna 20000T/PWS2-30P-CN	✓	✓
Turbo Energy	Hybrid Series HV 30.0/50.0	✓	✓
GROWATT	WIT 50K-HU/WIT 63K-HU/WIT 75K-HU/WIT 100K-HU	✓	✓
Megarevo	MP50030/MP50050	✓	✓
SAJ	CH2-29.9~50K-T6-P	✓	✓
GREENHEISS	GH-ITH 30 3M ADVANCED	✓	✓
Salicru	EQUINOX2 HSX	/	✓

*The communication protocols of CIESS Series /CIESS-R/CIESS-R-S Series are the same.

Inverter brand	Inverter model	SUNWODA ENERGY BATTERY SERIES	
		OASIS A200 	OASIS Rack Pro+ 
SMA	Sunny Island X 30/50	✓	✓
Solis	S6-EH3P(29.9-50)K-H	✓	✓
	S6-EH3P(75-125)K10-NV-YD-H	✓	✓
Deye	SUN-29.9/30/35/40/50K-SG01HP3-EU-BM	✓	✓
	SUN-60/70/75/80K-SG02HP3-EU-EM6	✓	✓
SOLINTEG	MHT-25K/30K/36K/40K/50K-100	✓	✓
	M2HT-25K/30K/40K/50K-150	✓	✓
	M2HT-75~125K-300	✓	✓
Megarevo	MP5030/MP5050/MP50100/MP50150/MP50250/MP50500	✓	✓
ATESS	PCS100/PCS250/PCS500/PCS630/PCS1000	✓	✓
SAJ	CH2-29.9~50K-T6-P	✓	✓
Sinexcel	Isuna L22/25/29.9/30/40/42.5/50K-TH	✓	✓

Inverter brand	Inverter model	SUNWODA ENERGY BATTERY SERIES
		OASIS L241 
SMA	Sunny Island X 30/50	✓
KACO	92.0 TL3-S	✓
ATESS	PCS100/PCS250/PCS500/PCS630/PCS1000 HPS100/150-HV	✓
GROWATT	WIT 50K-HU/WIT 63K-HU/WIT 75K-HU/WIT 100K-HU	✓
Sinexcel	PWS1-500KTL-EX	✓
Megarevo	MP50100/MP50150/MP50250/MP50500	✓
SOLINTEG	M2HT-25K/30K/40K/50K-150	✓
	M2HT-75~125K-300	✓
Deye	SUN-60/70/75/80K-SG02HP3-EU-EM6	✓
Solis	S6-EH3P(75-125)K10-NV-YD-H	✓
Sunwoda	OASIS Power(200、400kW)	✓

Inverter brand	Inverter model	SUNWODA ENERGY BATTERY SERIES
		OASIS L261 
SMA	Sunny Island X 30/50	✓
KACO	92.0 TL3-S	✓
Deye	SUN-60/70/75/80K-SG02HP3-EU-EM6	✓
Solis	S6-EH3P(75-125)K10-NV-YD-H	✓
SOLINTEG	M2HT-75~125K-300	✓
GROWATT	WIT 50K-HU/WIT 63K-HU/WIT 75K-HU/WIT 100K-HU	✓
Sunwoda	OASIS Power(200、400kW)	✓

